

Omega Chandelier



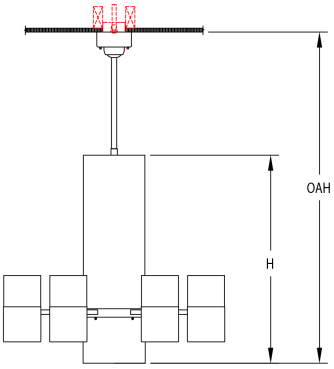



Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- OAH is standard unless specified.
- HOUSING: Solid spun aluminum cylinder housings with white acrylic cylinder diffusers supported by a cast aluminum center hub.
- MOUNTING: Fixture supplied with painted canopy, 60-degree swivel ball and heavy cast aluminum hanger for mounting to structural blocking by others.
- CIRCUITS: Two or Three Circuit wiring: Down lamp on circuit #1, Center lamps on circuit #2, Outside lamps on circuit #3 (incand. only).
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.
- ETL listed to UL standards for dry and damp locations

1 **Fixture Number**

CP-253 34"H x 36" Dia. 72" Oah.

CP-255 42.5"H x 48" Dia. 106" Oah.

2 **Finish**

Housing & Trim

Brushed Solid Aluminum (BA)

Standard Painted Finishes (PT)

3 **Lamping**

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

CP-253

Includes (1) 4,984 Lm center downlight and (6) 3,192 Lm outer downlights. Integral 120-277v 1-100% dimming drivers compatible with 01-0v, Triac, and ELV controls. All LEDs are 80+ CRI, 50,000 hr. L70.

LED Options	Lumens	Wattage
CH304 Body + Downlights	35488 (initial)	304

Non-LED Lamps

3N100 / 1R500 / 6R300: (3) 100 watt incandescent & (1) 500 watt R40 med. base & (6) 300 watt R40 med. base

CP-255

Includes (1) 6,664 Lm center downlight and (6) 3,192 Lm outer downlights. Integral 120-277v 1-100% dimming drivers compatible with 01-0v, Triac, and ELV controls. All LEDs are 80+ CRI, 50,000 hr. L70.

LED Options	Lumens	Wattage
CH325 Body + Downlights	39232 (initial)	325

Non-LED Lamps

6N100 / 1R500 / 6N100 / 6R300: (6) 100 watt incandescent & (1) 500 watt R40 med. base & (6) 100 watt incandescent & (6) 300 watt R40 med. base

4 **LED Color Temp**

27: 2700K

30: 3000K

35: 3500K

40: 4000K

5 **LED Dimming**

D0: 0-10v

D1: Triac (Leading Edge)*

D2: ELV (Trailing Edge)

6 **Downlight Optics Options**

B60: 60-deg. beam reflector

B90: 90-deg. beam reflector

CON: Concentric Ring Louver (approx. 50-deg. beam)

7 **Voltage Options**

120: 120 volt

277: 277 volt (Not available with incandescent lamp options)

8 **Diffuser Options**

WH: White Acrylic

1	2	3	4	5	6	7	8
Fixture #	Housing & Trim (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.