


# Omega Sconce

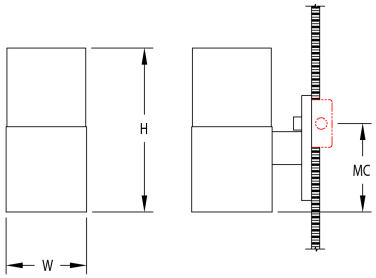



## Notes

-
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of a solid spun aluminum cylinder housing with a white acrylic cylinder diffuser.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

**1 Fixture Number**

**LB-158** 6"W x 12.5"H x 9" Ext.

**2 Finish**

**Housing & Trim**

Brushed Solid Aluminum (BA)

Standard Painted Finishes (PT)

**3 Lamping**

LED option includes integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

**LB-158**

| LED Options | Lumens | Wattage |
|---|---|---|
| S38 | | |

**Non-LED Lamps**

2N60: (2) 60 watt incandescent

**4 LED Color Temp**

27: 2700K

30: 3000K

35: 3500K

40: 4000K

**5 LED Dimming**

D0: 0-10v

D1: Triac (Leading Edge)*

D2: ELV (Trailing Edge)

**6 Voltage Options**

120: 120 volt

277: 277 volt (Not available with incandescent lamp options)

**7 Diffuser Options**

WH: White Acrylic

| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---|---|---|---|---|---|---|
| Fixture # | Housing & Trim (Finish) | Lamping | Color Temp | Dimming | Voltage | Diffuser |

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.