

Perf Pendant



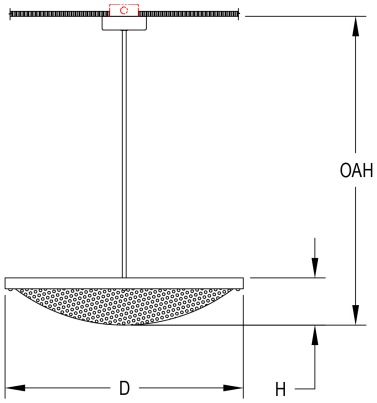



1 Fixture Number

DP-43-30 6"H x 30" Dia. 36" Oah.

DP-43-36 7"H x 36" Dia. 36" Oah.

2 Finish

Trim ring, stem, canopy.
Standard Painted Finishes (PT)

Perforated bowl
Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)

3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-43-30

LED Options	Lumens	Wattage
B48 Downlight + Uplight (48w)	1402 up/1533 down (delivered)	48

Non-LED Lamps
6N60: (6) 60 watt incandescent

DP-43-36

LED Options	Lumens	Wattage
B96 Downlight + Uplight (96w)	2804 up/3066 down (delivered)	96

Non-LED Lamps
6N75: (6) 75 watt incandescent

4 LED Color Temp
27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming
D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options
120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Stem Options


Single Stem (SIN)


Aircraft Cable (CBL)

1	2	2	3	4	5	6	7
Fixture #	Trim ring, ste (Finish)	Perforated bow (Finish)	Lamping	Color Temp	Dimming	Voltage	Stem

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.