

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Aluminum extrusion with integral LED board channel, heat sink, and acrylic blade support. Machined aluminum components.
- ACRYLIC: Clear 1/8" acrylic panels with laser-etched optical pattern to maximize light output and minimize glare.
- MOUNTING: Fixture supplied with canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box. OAH is standard unless specified.
- X119 with downlight adds 2.5" to Height dimension.
- UL & ULc listed for dry and damp locations.

1 Fixture Number
P-111 11.5"-12.5"W x 33"H 47.5-49.5 Oah.

2 Finish
 Standard Painted Finishes (PT)

3 Lamping
 Includes constant current 1-100% dimming drivers mounted in ceiling canopy (or remote). Compatible with 0-10v, Triac, and ELV dimming controls. All LEDs are 80+ CRI, 50,000 hr. L70. Downlight separately circuited.

LED Options	Lumens	Wattage
X84 Blades Only (84w)	8620 (delivered)	84
X119 Blades (84W) + Downlight (35w)	11872 (delivered)	119


4 LED Color Temp
 40: 4000K

5 LED Dimming
 D0: 0-10v
 D1: Triac (Leading Edge)*
 D2: ELV (Trailing Edge)

6 Downlight Optics Options
 B30: 30-deg. beam reflector
 B60: 60-deg. beam reflector
 B90: 90-deg. beam reflector

7 Voltage Options
 120: 120 volt
 277: 277 volt (Not available with incandescent lamp options)

8 Diffuser Options
 PLG: Planar Optical LightGuide

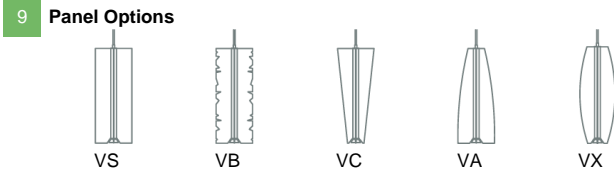

10 Fixture Options
 *SP: 10kA surge protector (Recommended for D1 dimming option)

1	2	3	4	5	6	7	8	9	10
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Diffuser	Panel	Fixture Option