

**1 Fixture Number**  
**P-106** 48.75"W x 10"H x 48.75"L x 13" Dia. 34" Oah.

**2 Finish**  
 Standard Painted Finishes (PT)

**3 Lamping**  
 Includes constant current 1-100% dimming drivers mounted in ceiling canopy (or remote). Compatible with 0-10v, Triac, and ELV dimming controls. All LEDs are 80+ CRI, 50,000 hr. L70. Downlight separately circuited.  
**P-106**  
 LED downlight is COB array producing 3,942 lumens @ 4000K.

LED Options	Lumens	Wattage
X54 Blades Only (54w)	6505 (delivered)	54
X89 Blades (54w) + Downlight (35w)	6505 blades/3098 dn (delivered)	89


**4 LED Color Temp**  
 40: 4000K

**5 LED Dimming**  
 D0: 0-10v  
 D1: Triac (Leading Edge)\*  
 D2: ELV (Trailing Edge)

**6 Downlight Optics Options**  
 B30: 30-deg. beam reflector  
 B60: 60-deg. beam reflector  
 B90: 90-deg. beam reflector

**7 Voltage Options**  
 120: 120 volt  
 277: 277 volt (Not available with incandescent lamp options)

**8 Diffuser Options**  
 PLG: Planar Optical LightGuide

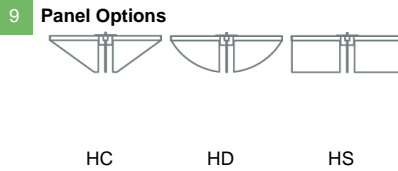

1	2	3	4	5	6	7	8	9
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Diffuser	Panel