

Plateau Sconce

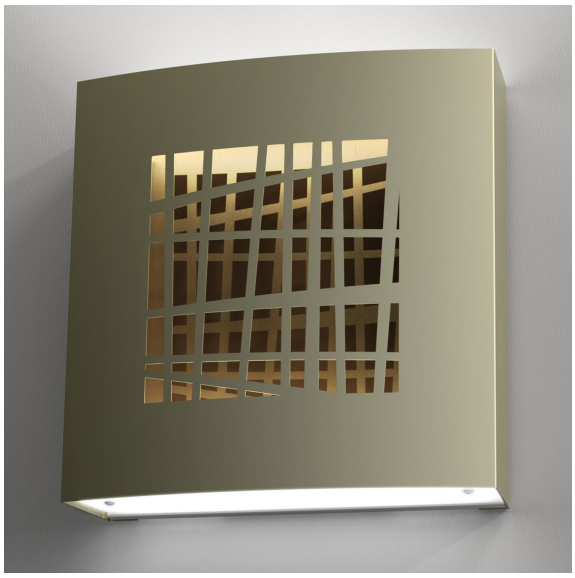

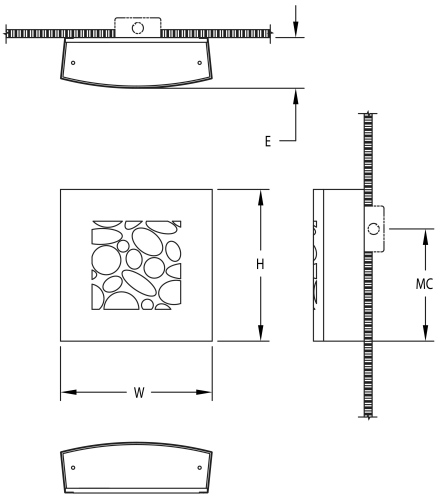

Notes

- Specify three digit color suffix with "PT" and "PG" finish options for front and rear (reflective) panels. A lighter housing color and darker rear panel will produce the most intense reflection.
- HOUSING: Fabricated solid aluminum housing and separate background accent panel. Top and bottom white acrylic diffusers.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- Top and bottom opal white acrylic lenses standard.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

LB-061 12"W x 12"H x 4" Ext.

2 Finish

Housing (Primary color)
Standard Painted Finishes (PT)

Back panel (Secondary color)
Gloss Painted Finish (PG)

3 Lamping

LED option includes integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LB-061

LED Options	Lumens	Wattage
S16	995 (delivered)	16

Non-LED Lamps
2NT40: (2) 40 watt T-10 incandescent


4 LED Color Temp
27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming
D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options
120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options
WH: White Acrylic

8 Panel Options

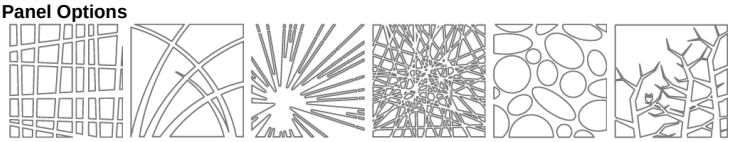

1	2	2	3	4	5	6	7	8
Fixture #	Housing (Prima (Finish)	Back panel (Se (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Panel

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.