
Plinth Round Pendant



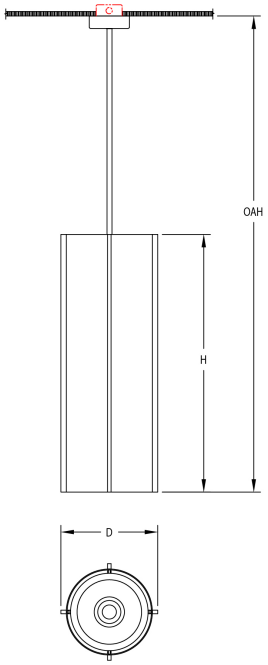

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Four machined aluminum, brass, or wood trim bars over an extruded white acrylic cylinder diffuser.
- MOUNTING: Fixture supplied with painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- CIRCUITS: Dual-level circuiting for interior lamps/downlight standard.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

LP-091 22"H x 9.5" Dia. 48" Oah.
LP-092 30"H x 11.5" Dia. 68" Oah.
LP-094 36"H x 13.5" Dia. 86" Oah.

2 Finish

Trim

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)
Brushed Solid Brass (BB)
Polished Brass (PB)

Bar trim

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)
Brushed Solid Brass (BB)
Polished Brass (PB)
Wood Trim (WT)

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LP-091

LED Options	Lumens	Wattage
P27 Body only w/bottom lens (27W)	2730 (delivered)	27
P63 Body (27w) + Downlight (36w)	5471 (delivered)	63

Non-LED Lamps

1N200: 200 watt A-21 med. base

LP-092

LED Options	Lumens	Wattage
P40 Body only w/bottom lens (40w)	3796 (delivered)	40
P88 Body (40w) + Downlight (48w)	8128 (delivered)	88
U18 Optional Uplight (18w)	1613 (delivered)	18

Non-LED Lamps

8N75 / 1R300: (8) 75 watt incandescent & (1) 300 watt R40 med. base

LP-094

LED Options	Lumens	Wattage
P54 Body only w/bottom lens (54w)	5555 (delivered)	54
P109 Body (54w) + Downlight (55w)	11760 (delivered)	109
P150 Body (54w) + Downlight (96w)	14818 (delivered)	150
U44 Optional Uplight (44w)	4038 (delivered)	44

Non-LED Lamps

10N100 / 1R500: (10) 100 watt incandescent & (1) 500 watt R40 med. base

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Downlight Optics Options

B60: 60-deg. beam reflector
B90: 90-deg. beam reflector
CON: Concentric Ring Louver (approx. 50-deg. beam)
ECR: Black Egg Crate Louver (approx. 40-deg. beam)

7 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

8 Diffuser Options

WH: White Acrylic

1	2	2	3	4	5	6	7	8
Fixture #	Trim (Finish)	Bar trim (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.