
Plinth Square Sconce



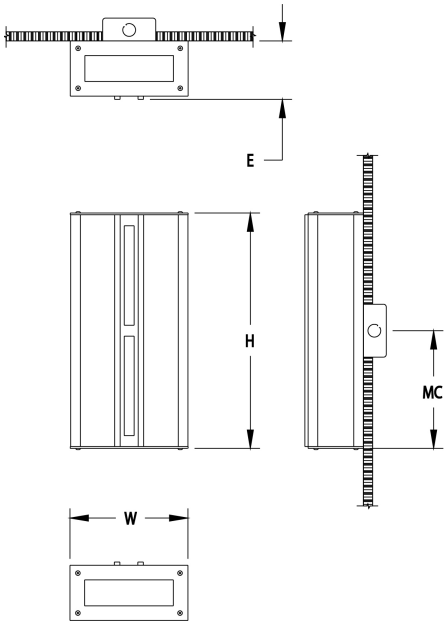

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Solid aluminum top and bottom end caps, extruded aluminum corner posts and laser-cut aluminum accent panel. Solid aluminum or wood bar stock accents.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

LB-094 8"W x 16"H x 4" Ext.

2 Finish

End plates, trim bars, trim panels

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)

Bar Trim

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)
Wood Trim (WT)

3 Lamping

LED option includes integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LB-094

LED Options	Lumens	Wattage
S7	612 (delivered)	7

Non-LED Lamps

2NT60: (2) 60 watt T-10 incandescent

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

CB: Cobalt Blue Acrylic
PF: Perforated Aluminum
WH: White Acrylic

1	2	2	3	4	5	6	7
Fixture #	End plates, tr (Finish)	Bar Trim (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.