



Puck Lume sconce





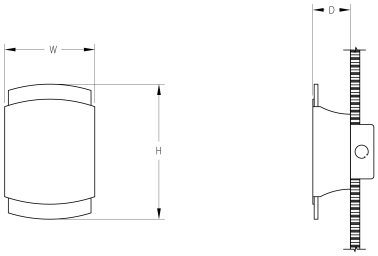





1 Fixture Number

W-101	6"W x 9"H x 2.5" Dia.
W-103	6"W x 8.5"H x 2.5" Dia.
W-105	6"W x 8.5"H x 2.5" Dia.
W-107	6"W x 8.5"H x 2.5" Dia.

2 Finish

Housing

Standard Painted Finishes (PT)

3 Lamping

Includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

W-101

LED Options	Lumens	Wattage
W14 Uplight (7w) + Downlight (7w)	1021 (delivered)	14

W-103

LED Options	Lumens	Wattage
W14 Uplight (7w) + Downlight (7w)	1021 (delivered)	14

W-105

LED Options	Lumens	Wattage
W14 Uplight (7w) + Downlight (7w)	1021 (delivered)	14

W-107

LED Options	Lumens	Wattage
W14 Uplight (7w) + Downlight (7w)	1021 (delivered)	14

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

AWH: Satin Ice White
ALG: Satin Ice Light Green
ACR: Cherry Red
ASB: Sky Blue
APN: Pine
AMD: Mandarin
FMC: Mica

1	2	3	4	5	6	7
Fixture #	Housing (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.