
Ravello Sconce



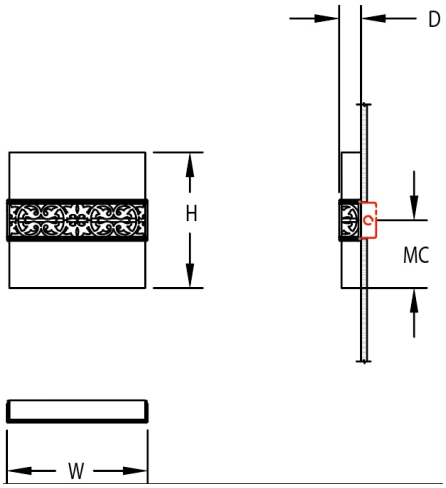

Notes

- CIRCUITS: Single circuit.
- ETL listed to UL standards for dry or damp locations.
- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of a fabricated acrylic diffuser with cast aluminum band.
- MOUNTING: Fixture mounts to standard octagonal electrical box.

1 Fixture Number

DS-750 14.5"W x 14.5"H x 2.5" Ext.

2 Finish

Panel

Standard Painted Finishes (PT)

3 Lamping

LED option includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DS-750

LED Options	Lumens	Wattage
S26	3860 Initial	26

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic

1 Fixture # | 2 Panel (Finish) | 3 Lamping | 4 Color Temp | 5 Dimming | 6 Voltage | 7 Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.