
1 Fixture Number

DE-215 13.25"W x 30"H x 6.5" Ext.
DE-216 19.75"W x 45"H x 9.75" Ext.

2 Finish

Frame
Standard Painted Finishes (PT)

Panels
Standard Painted Finishes (PT)
Raw Copper (CU)

Optional Bar Trim on R1 Panel

No bar trim on R1 panel (NA)
Brushed Stainless Steel (BS)
Powder coat paint (PP)
Polished stainless steel (PS)

3 Lamping

Includes integral wet location rated 120-277v 1-100% dimming driver compatible with 0-10v controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DE-215

LED Options	Lumens	Wattage
E23	1636 (initial)	23

Non-LED Lamps

3N60: (3) 60 watt incandescent

DE-216

LED Options	Lumens	Wattage
E34	2452 (initial)	34
E34/1QP75		

Non-LED Lamps

4N60: (4) 60 watt incandescent

4 LED Color Temp

27: 2700K

30: 3000K

35: 3500K

40: 4000K

5 LED Dimming

D0: 0-10v

6 Voltage Options

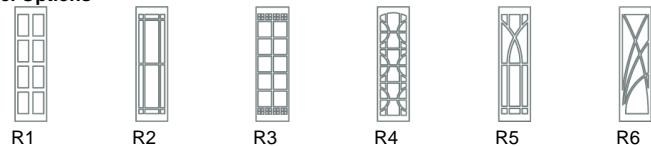
120: 120 volt

277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic

FX: Faux Alabaster Acrylic

8 Panel Options

9 Fixture Options

PC: Photo Cell

TAL: Top Acrylic Lens

1	2	2	2	3	4	5	6	7	8	9
Fixture #	Frame (Finish)	Panels (Finish)	Optional Bar T (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Panel	Fixture Option