

## Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of heavy gauge extruded aluminum corner posts, solid cast aluminum end caps and laser-cut aluminum trim panels.
- MOUNTING: Fixture supplied with gasketed mounting plate, and visible hardware. Fixture requires additional support by wall anchors or studs attached to structural blocking provided by installing electrician. Standard octagonal junction box required.
- ETL listed to UL standards for wet locations.
- Fluorescent and metal halide ballasts rated to - 22-degree F
- All MH lamp options include integral electronic ballast.

### 1 Fixture Number

- DE-205 11"W x 30"H x 5.5" Ext.
- DE-206 15.5"W x 45"H x 7.75" Ext.

### 2 Finish

- |                                |                                |
|--------------------------------|--------------------------------|
| <b>Frame</b>                   | <b>Panels</b>                  |
| Standard Painted Finishes (PT) | Standard Painted Finishes (PT) |
|                                | Raw Copper (CU)                |

#### Optional Bar Trim on R1 Panel

- No bar trim on R1 panel (NA)
- Brushed Stainless Steel (BS)
- Powder coat paint (PP)
- Polished stainless steel (PS)

### 3 Lamping

Includes integral wet location rated 120-277v 1-100% dimming driver compatible with 0-10v controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

#### DE-205

LED Options	Lumens	Wattage
E23	1636 (initial)	23

#### Non-LED Lamps

3N60: (3) 60 watt incandescent

#### DE-206

LED Options	Lumens	Wattage
E34	2452 (initial)	34
E34/1QP75		

#### Non-LED Lamps

4N60: (4) 60 watt incandescent

### 4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

### 5 LED Dimming

D0: 0-10v


### 6 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

### 7 Diffuser Options

- WH: Opal White Acrylic
- FX: Faux Alabaster Acrylic

### 8 Panel Options

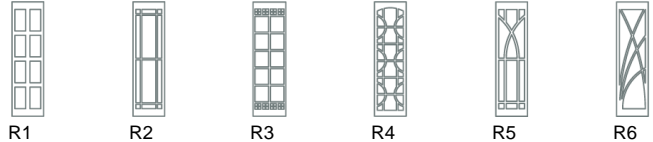

### 9 Fixture Options

- PC: Photo Cell

1	2	2	2	3	4	5	6	7	8	9
Fixture #	Frame (Finish)	Panels (Finish)	Optional Bar T (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Panel	Fixture Option