
Roman Sconce



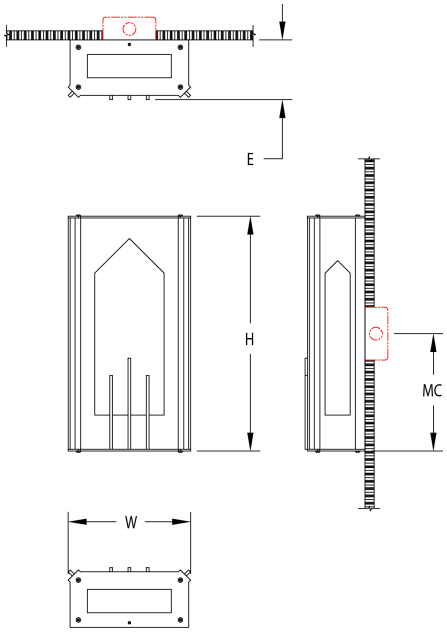

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Solid aluminum top and bottom end caps, extruded aluminum corner posts and laser-cut aluminum accent panel. Solid aluminum or brass bar stock accents.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

LB-077 8"W x 16"H x 4" Ext.

2 Finish

Panel & Trim

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)
Faux Antique Brass (FAB)

Bar Trim

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)
Faux Antique Brass (FAB)
Brushed Solid Brass (BB)

3 Lamping

LED option includes integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LB-077

LED Options	Lumens	Wattage
S7	612 (delivered)	7

Non-LED Lamps

2NT60: (2) 60 watt T-10 incandescent

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic
IV: Ivory acrylic
FX: Faux Alabaster Acrylic

1	2	2	3	4	5	6	7
Fixture #	Panel & Trim (Finish)	Bar Trim (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.