

Schoolhouse Pendant



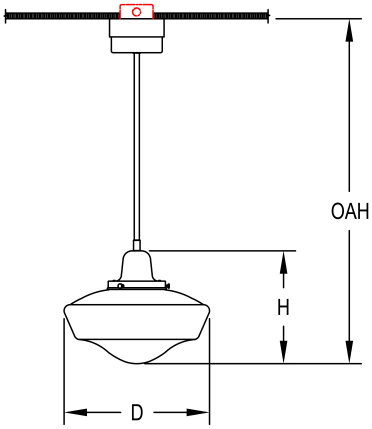



Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- OAH is standard unless specified.
- HOUSING: Spun aluminum fitter and opal white glass shade.
- MOUNTING: Fixture supplied with canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- ETL listed to UL standards for dry and damp locations.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

DP-44-14	12"H x 14" Dia.	38" Oah.
DP-44-16	12"H x 16" Dia.	38" Oah.
DP-44-18	15.5"H x 18" Dia.	42" Oah.

2 Finish

Standard Painted Finishes (PT)

Polished Brass (PB)

3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-44-14

LED Options	Lumens	Wattage
P20 Uplight + Downlight	2383 (delivered)	20

Non-LED Lamps

1N100: (1) 100 watt incandescent

DP-44-16

LED Options	Lumens	Wattage
P20 Uplight + Downlight	2383 (delivered)	20

Non-LED Lamps

1N200: 200 watt A-21 med. base

DP-44-18

LED Options	Lumens	Wattage
P20 Uplight + Downlight	2383 (delivered)	20

Non-LED Lamps

1N200: 200 watt A-21 med. base

4 LED Color Temp

27: 2700K

30: 3000K

35: 3500K

40: 4000K

5 LED Dimming

D0: 0-10v

D1: Triac (Leading Edge)*

D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt

277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WHG: Opal White Glass

1	2	3	4	5	6	7
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.