
Sentinel Exterior Sconce



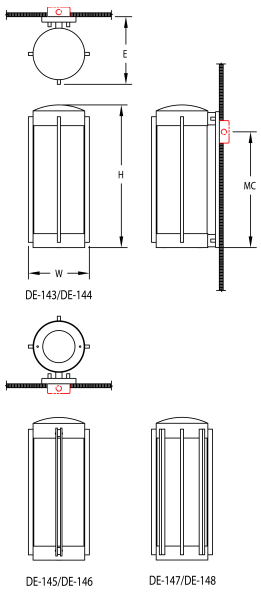

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Spun aluminum end caps and solid stainless steel bar details over an extruded white acrylic cylinder diffuser.
- MOUNTING: Fixture supplied with gasketed universal mounting plate for installation over standard octagonal junction box.
- ETL listed to UL standards for wet locations.

1 Fixture Number

DE-143	10"W x 20"H x 12" Ext.
DE-144	12"W x 26.5"H x 14" Ext.
DE-147	10"W x 20"H x 12" Ext.
DE-148	12"W x 26.5"H x 14" Ext.

2 Finish

Frame
Standard Painted Finishes (PT)

Bars
Brushed Stainless Steel (BS)
Standard Painted Finishes (PT)

3 Lamping

Includes integral wet location rated 120-277v 1-100% dimming driver compatible with 0-10v controls. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DE-143

LED Options	Lumens	Wattage
E22	1636 (initial)	22
E22/1QP75		

Non-LED Lamps
2N60 / 1QP75: (2) 60 watt incandescent & (1) 75 watt PAR30 halogen med. base

DE-144

LED Options	Lumens	Wattage
E22	1636 (initial)	22
E22/1QP75		

Non-LED Lamps
2N60 / 1QP75: (2) 60 watt incandescent & (1) 75 watt PAR30 halogen med. base

DE-147

LED Options	Lumens	Wattage
E22	1636 (initial)	22
E22/1QP75		

Non-LED Lamps
2N60 / 1QP75: (2) 60 watt incandescent & (1) 75 watt PAR30 halogen med. base

DE-148

LED Options	Lumens	Wattage
E22	1636 (initial)	22
E22/1QP75		

Non-LED Lamps
2N60 / 1QP75: (2) 60 watt incandescent & (1) 75 watt PAR30 halogen med. base

4 LED Color Temp
27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming
D0: 0-10v

6 Voltage Options
120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options
WH: White Acrylic

8 Fixture Options
PC: Photo Cell

1	2	2	3	4	5	6	7	8
Fixture #	Frame (Finish)	Bars (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Fixture Option

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.