Site Pendant



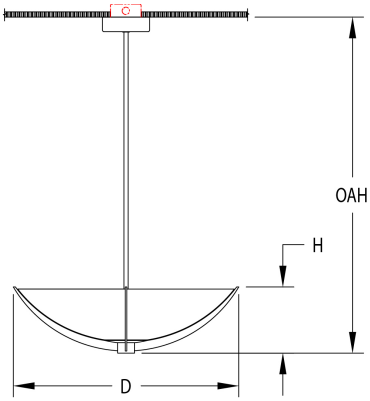



Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- OAH is standard unless specified.
- HOUSING: Consists of an acrylic bowl diffuser or spun aluminum bowl with laser-cut aluminum bar details and optional "FIN" stem kit.
- MOUNTING: Fixture supplied with a painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

DP-260	6.75"H	x 18.75" Dia. 32" Oah.
DP-262	8"H	x 26.75" Dia. 34" Oah.
DP-266	10.5"H	x 34.5" Dia. 48" Oah.

2 Finish

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)

3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-260

LED Options	Lumens	Wattage
B32 Uplight + Downlight	1097 up/1097 down (delivered)	32

Non-LED Lamps
3N100: (3) 100 watt incandescent

DP-262

LED Options	Lumens	Wattage
B64 Uplight + Downlight	2545 up/1855 down (delivered)	64

Non-LED Lamps
4N100: (4) 100 watt incandescent

DP-266

LED Options	Lumens	Wattage
B145R Uplight + Downlight	8309 up/2782 down (delivered)	145

Non-LED Lamps
6N100: (6) 100 watt incandescent

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

PT: Standard Painted Finishes
BA: Brushed Solid Aluminum
WH: White Acrylic
FX: Faux Alabaster Acrylic

8 Stem Options


Single Stem (SIN)


1/4" Plate Fins (FIN)

1 Fixture # | 2 Finish (Finish) | 3 Lamping | 4 Color Temp | 5 Dimming | 6 Voltage | 7 Diffuser | 8 Stem

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.