


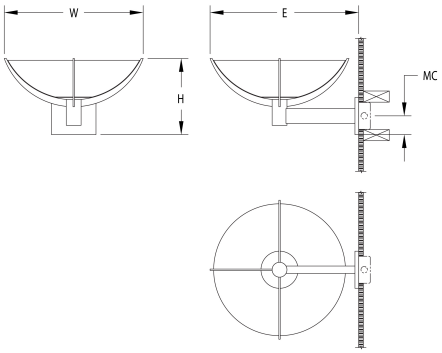

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of an acrylic bowl diffuser or spun aluminum bowl with laser-cut aluminum bar details, extruded aluminum support arm and fabricated aluminum wall plate.
- MOUNTING: Fixture requires additional support by wall anchors or studs attached to structural blocking provided by installing electrician. Fixture mounts to a standard octagonal junction box.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 **Fixture Number**

DS-210 18.75"W x 10.25"H x 20" Ext.

DS-212 26.75"W x 11.5"H x 28" Ext.

2 **Finish**

Brushed Solid Aluminum (BA)

Standard Painted Finishes (PT)

3 **Lamping**

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DS-210

LED Options	Lumens	Wattage
S32	3440 (initial)	32

Non-LED Lamps

3N100: (3) 100 watt incandescent

DS-212

LED Options	Lumens	Wattage
S65	6995 (initial)	65

Non-LED Lamps

4N100: (4) 100 watt incandescent

4 **LED Color Temp**

27: 2700K

30: 3000K

35: 3500K

40: 4000K

5 **LED Dimming**

D0: 0-10v

D1: Triac (Leading Edge)*

D2: ELV (Trailing Edge)

6 **Voltage Options**

120: 120 volt

277: 277 volt (Not available with incandescent lamp options)

7 **Diffuser Options**

PT: Standard Painted Finishes

BA: Brushed Solid Aluminum

WH: White Acrylic

FX: Faux Alabaster Acrylic

1	2	3	4	5	6	7
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.