



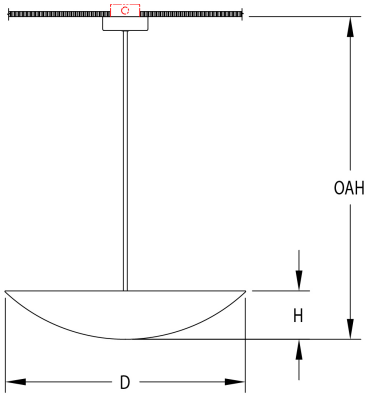



Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of a simple large spun aluminum bowl housing and choice of stem kit.
- MOUNTING: Fixture supplied with a painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
  DP-928: Fixture supplied with a painted canopy, 60-degree swivel ball and hanger. Structural support is required for this heavy fixture. 2 x 4 blocking or 1/2" IP stud extending 1/2" below finished ceiling through center of octagonal junction box is required.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

DP-920	5"H	x	24" Dia.	31" Oah.
DP-922	6"H	x	30" Dia.	44" Oah.
DP-924	7"H	x	36" Dia.	45" Oah.
DP-926	8"H	x	42" Dia.	58" Oah.
DP-928	9"H	x	60" Dia.	71" Oah.

2 Finish

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-920

LED Options	Lumens	Wattage
U32 Uplight	2545 (delivered)	32

DP-922

LED Options	Lumens	Wattage
U64 Uplight	5090 (delivered)	64

DP-924

LED Options	Lumens	Wattage
U96 Uplight	7635 (delivered)	96

DP-926

LED Options	Lumens	Wattage
U129 Uplight	10180 (delivered)	128

DP-928

LED Options	Lumens	Wattage
U160 Uplight	12725 delivered	160

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Stem Options


Single Stem (SIN)


Aircraft Cable (CBL)


Satellite Rods (QAD)


Angled Rods (TST)

1 Fixture # | 2 Finish (Finish) | 3 Lamping | 4 Color Temp | 5 Dimming | 6 Voltage | 7 Stem

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.