


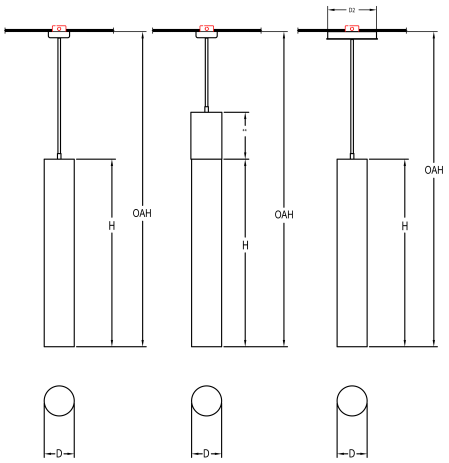

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: White 1/8" thick extruded acrylic cylinder diffuser with white painted aluminum bottom disk. Aluminum driver housing.
- MOUNTING: Fixture supplied with canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.

- CIRCUITS: Dual-level circuiting for interior lamps and downlight (if specified) standard.
- DOWNLIGHT: Downlight increases H and OAH dimensions by 3".
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.
- DKC CANOPY: Canopy is 8" dia. (D2 dim.) for P57 option. All others use 13" dia canopy (D3 dim.).
- ETL listed to UL standards for dry and damp locations.

1 Fixture Number

LP-572-08	24"H x 8" Dia. 48" Oah.	**LP-574-12**	48"H x 12" Dia. 72" Oah.
LP-572-10	24"H x 10" Dia. 48" Oah.	**LP-576-08**	72"H x 8" Dia. 96" Oah.
LP-572-12	24"H x 12" Dia. 48" Oah.	**LP-576-10**	72"H x 10" Dia. 96" Oah.
LP-573-08	36"H x 8" Dia. 60" Oah.	**LP-576-12**	72"H x 12" Dia. 96" Oah.
LP-573-10	36"H x 10" Dia. 60" Oah.	**LP-578-08**	96"H x 8" Dia. 120" Oah.
LP-573-12	36"H x 12" Dia. 60" Oah.	**LP-578-10**	96"H x 10" Dia. 120" Oah.
LP-574-08	48"H x 8" Dia. 72" Oah.	**LP-578-12**	96"H x 12" Dia. 120" Oah.
LP-574-10	48"H x 10" Dia. 72" Oah.		

2 Finish

Housing, Stem & Canopy

Standard Painted Finishes (PT)

3 Lamping

Includes integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LP-572

LED downlight is COB array with 2,168 delivered lumens @ 3500K.

LED Options	Lumens	Wattage
P57 Body Only (57w)	6042 (delivered)	57
P80 Body (57w) + Downlight (23w)	8210 (delivered)	80

LP-573

LED downlight is COB array with 2,168 delivered lumens @ 3500K.

LED Options	Lumens	Wattage
P86 Body Only (86w)	9065 (delivered)	86
P110 Body (86w) + Downlight (23w)	11233 (delivered)	109

LP-574

LED downlight is COB array with 2,168 delivered lumens @ 3500K.

LED Options	Lumens	Wattage
P115 Body Only (115w)	12088 (delivered)	115
P138 Body (115w) + Downlight (23w)	14256 (delivered)	138

LP-576

LED downlight is COB array with 2,168 delivered lumens @ 3500K.

LED Options	Lumens	Wattage
P173 Body Only (173w)	18133 (delivered)	173
P196 Body (173w) + Downlight (23w)	20301 (delivered)	196

LP-578

LED downlight is COB array with 2,168 delivered lumens @ 3500K.

LED Options	Lumens	Wattage
P230 Body Only (230w)	24177 (delivered)	230
P253 Body (230w) + Downlight (23w)	26345 (delivered)	253

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Downlight Optics Options

B50: 50-deg. beam reflector

7 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

8 Diffuser Options

WH: White Acrylic

9 Stem Options



Single Stem (SIN)

Aircraft cable with cord (KBL)

10 Fixture Options

INT: Integral LED drivers. Increases H and OAH dimensions by 11.5"
REM: Remote driver box
DKC: Disk ceiling driver canopy

1	2	3	4	5	6	7	8	9	10
Fixture #	Housing, Stem (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Diffuser	Stem	Fixture Option

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.