

Tradition Cornice Chandelier



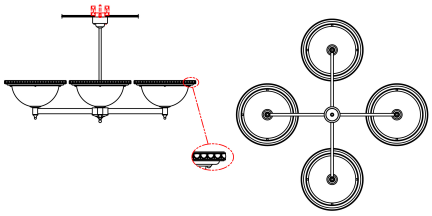

CP-830


CP-831

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of spun aluminum or brass rings trimmed with cast aluminum or brass band, acrylic bowl diffuser and choice of stem kit.
- MOUNTING:
  CP-830 & 832: Fixture specified with brushed or painted finish supplied with swivel hanger for mounting to standard octagon junction box. Fixture specified with brass material supplied with swivel hanger requiring attachment to structure using a ceiling fan rated electrical box.
  CP-831 & CP-833: Fixture supplied with a painted canopy, 60-degree swivel ball and hanger. Structural support is required for this heavy fixture. 2 x 4 blocking or 1/2" IP stud extending 1/2" below finished ceiling through center of octagonal junction box is required.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

CP-830	14.5"H x 72.5" Dia. 34" Oah.	**CP-832**	17"H x 84" Dia. 46" Oah.
CP-831	14.5"H x 72.5" Dia. 34" Oah.	**CP-833**	17"H x 84" Dia. 46" Oah.

2 Finish

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)
Polished Brass (PB)
Solid Antique Brass (SAB)
Faux Antique Brass (FAB)
Egg & Dart Cast Trim (EGD)
Greek Key Cast Trim (GRK)
Rope Cast Trim (ROP)

3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

CP-830 ()

LED Options	Lumens	Wattage
CH130 Two Bowls - Up & Downlight	2545 up/1855 dn per bowl (delivered)	130

Non-LED Lamps
6N100: (6) 100 watt incandescent

CP-831 ()

LED Options	Lumens	Wattage
CH260 Four Bowls - Up & Downlight	2545 up/1855 dn per bowl (delivered)	260

Non-LED Lamps
12N100: (12) 100 watt incandescent

CP-832 ()

LED Options	Lumens	Wattage
CH256 Two Bowls - Up & Downlight	5091 up/3719 dn per bowl (delivered)	256

Non-LED Lamps
8N100: (8) 100 watt incandescent

CP-833 ()

LED Options	Lumens	Wattage
CH512 Four Bowls - Up & Downlight	5091 up/3710 dn per bowl (delivered)	512

Non-LED Lamps
16N100: (16) 100 watt incandescent

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic
FX: Faux Alabaster Acrylic

8 Stem Options


Single Stem (SIN)


Satellite Rods (QAD)


Traditional Chain (TCH)

1	2	2	3	4	5	6	7	8
Fixture #	Finish (Finish)	(Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Stem

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.