
Tradition Cornice Sconce



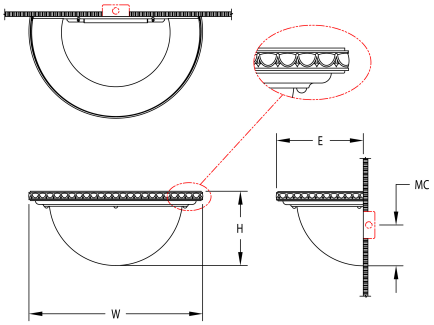

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of spun aluminum or brass ring trimmed with cast aluminum or brass band, acrylic bowl diffuser.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

DS-830 18.75"W x 7.75"H x 9.5" Ext.

DS-832 23.5"W x 10"H x 11.75" Ext.

2 Finish

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)
Polished Brass (PB)
Solid Antique Brass (SAB)
Faux Antique Brass (FAB)

Cast Band Design

Egg & Dart Cast Trim (EGD)
Greek Key Cast Trim (GRK)
Rope Cast Trim (ROP)

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DS-830

LED Options	Lumens	Wattage
S7	612 (delivered)	7

Non-LED Lamps

2N60: (2) 60 watt incandescent

DS-832

LED Options	Lumens	Wattage
S8	1193 (initial)	8

Non-LED Lamps

2N100: (2) 100 watt incandescent

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic
FX: Faux Alabaster Acrylic

1	2	2	3	4	5	6	7
Fixture #	Finish (Finish)	Cast Band Desi (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.