

## Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of a spun aluminum or brass trim ring, an acrylic bowl diffuser with a spun aluminum or brass downlight bezel and choice of stem kit.
- MOUNTING: Fixture supplied with a painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- ETL listed to UL standards for dry and damp locations
- \*Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

### 1 Fixture Number

<b>DP-450</b>	10.25"H x 23" Dia. 36" Oah.
<b>DP-452</b>	11.75"H x 31.5" Dia. 49" Oah.
<b>DP-456</b>	13.75"H x 40" Dia. 63" Oah.

### 2 Finish

- Brushed Solid Aluminum (BA)
- Standard Painted Finishes (PT)
- Polished Brass (PB)
- Solid Antique Brass (SAB)
- Faux Antique Brass (FAB)

### 3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency. Two-circuit wiring ~~DP-450~~.

LED downlight is Cree COB array producing 3,945 initial lumens at 3500K.

LED Options	Lumens	Wattage
B84 Uplight + Downlight	5160 bowl/3945 down (initial)	84

#### Non-LED Lamps

3N100 / 1QP75: (3) 100 watt incandescent & (1) 75 watt PAR30 halogen med. base

#### DP-452

LED downlight is Cree COB array producing 4,984 initial lumens at 3500K.

LED Options	Lumens	Wattage
B144 Uplight + Downlight	10320 bowl/4984 down (initial)	144

#### Non-LED Lamps

3N150 / 1QP120: (3) 150 watt incandescent & (1) 120 watt PAR 38 quartz halogen

#### DP-456

LED downlight is Cree COB array producing 6,664 initial lumens at 3500K.

LED Options	Lumens	Wattage
B183 Uplight + Downlight	13760 bowl/6664 down (initial)	183

#### Non-LED Lamps

6N100 / 1QP250: (6) 100 watt incandescent & (1) 250 watt PAR38 med. base

### 4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

### 5 LED Dimming

- D0: 0-10v
- D1: Triac (Leading Edge)\*
- D2: ELV (Trailing Edge)


### 6 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

### 7 Diffuser Options

- WH: White Acrylic
- FX: Faux Alabaster Acrylic

### 8 Stem Options

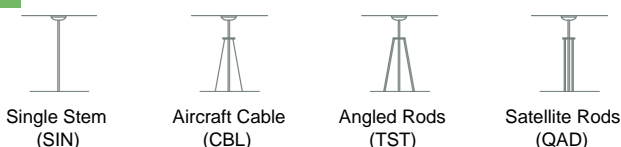

1	2	3	4	5	6	7	8
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Stem