

Tradition Pendant with Downlight



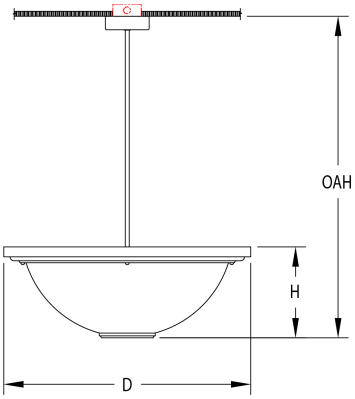



Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of a spun aluminum or brass trim ring, an acrylic bowl diffuser with a spun aluminum or brass downlight bezel and choice of stem kit.
- MOUNTING: Fixture supplied with a painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

DP-450	10.25"H x 23" Dia.	36" Oah.
DP-452	11.75"H x 31.5" Dia.	49" Oah.
DP-456	13.75"H x 40" Dia.	63" Oah.

2 Finish

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)
Polished Brass (PB)
Solid Antique Brass (SAB)
Faux Antique Brass (FAB)

3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency. Two-circuit wiring standard.

DP-450

LED downlight is Cree COB array producing 3,945 initial lumens at 3500K.

LED Options	Lumens	Wattage
B84 Uplight + Downlight	5160 bowl/3945 down (initial)	84

Non-LED Lamps

3N100 / 1QP75: (3) 100 watt incandescent & (1) 75 watt PAR30 halogen med. base

DP-452

LED downlight is Cree COB array producing 4,984 initial lumens at 3500K.

LED Options	Lumens	Wattage
B144 Uplight + Downlight	10320 bowl/4984 down (initial)	144

Non-LED Lamps

3N150 / 1QP120: (3) 150 watt incandescent & (1) 120 watt PAR 38 quartz halogen

DP-456

LED downlight is Cree COB array producing 6,664 initial lumens at 3500K.

LED Options	Lumens	Wattage
B183 Uplight + Downlight	13760 bowl/6664 down (initial)	183

Non-LED Lamps

6N100 / 1QP250: (6) 100 watt incandescent & (1) 250 watt PAR38 med. base

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic
FX: Faux Alabaster Acrylic

8 Stem Options


Single Stem (SIN)


Aircraft Cable (CBL)


Angled Rods (TST)


Satellite Rods (QAD)

1 Fixture # | 2 Finish (Finish) | 3 Lamping | 4 Color Temp | 5 Dimming | 6 Voltage | 7 Diffuser | 8 Stem

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.