

Transitional Pendant



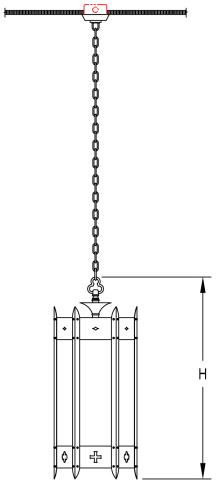



Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of fabricated steel trim panels and corner trim posts.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- CIRCUITS: Dual-level circuiting for interior lamps/downlight standard.
- OVERALL HEIGHT: Standard OAH includes fixture height plus 6' main chain to ceiling.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.
- This fixture is suspended by chain. Brown power cord included for D1 (Triac) and D2 (ELV) dimming. Black five-conductor cord supplied for D0 (0-10v) dimming.

1 **Fixture Number**

LPI-347-08 23.75"H x 8.5" Dia. 96" Oah.
LPI-347-11 28"H x 11.75" Dia. 100" Oah.
LPI-347-13 32.25'H x 13.25" Dia. 104" Oah.
LPI-347-16 39.5"H x 16.5" Dia. 112" Oah.

2 **Finish**

Standard Painted Finishes (PT)

3 **Lamping**

LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LPI-347-08

LED Options	Lumens	Wattage
P27 Body only w/bottom lens (27W)	2730 (delivered)	27

Non-LED Lamps

1N100: (1) 100 watt incandescent

LPI-347-11

LED Options	Lumens	Wattage
P27 Body only w/bottom lens (27W)	2730 (delivered)	27
P50 Body (14w) + Downlight (36w)	5881 (initial)	50

Non-LED Lamps

3N60 / 1R300: (3) 60 watt incandescent & (1) 300 watt R40 med. base

LPI-347-13

LED Options	Lumens	Wattage
P27 Body only w/bottom lens (27W)	2730 (delivered)	27
P63 Body (27w) + Downlight (36w)	5471 (delivered)	63

Non-LED Lamps

6N60 / 1R500: (6) 60 watt incandescent & (1) 500 watt R40 med. base

LPI-347-16

LED Options	Lumens	Wattage
P54 Body only w/bottom lens (54w)	5555 (delivered)	54
P109 Body (54w) + Downlight (55w)	11760 (delivered)	109
P150 Body (54w) + Downlight (96w)	14818 (delivered)	150
U44 Optional Uplight (44w)	4038 (delivered)	44

Non-LED Lamps

6N60 / 1R500: (6) 60 watt incandescent & (1) 500 watt R40 med. base

4 **LED Color Temp**

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 **LED Dimming**

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 **Downlight Optics Options**

B60: 60-deg. beam reflector
B90: 90-deg. beam reflector
CON: Concentric Ring Louver (approx. 50-deg. beam)

7 **Voltage Options**

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

8 **Diffuser Options**

WH: White Acrylic
IV: Ivory acrylic
FX: Faux Alabaster Acrylic

1	2	3	4	5	6	7	8
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.