

Tribute ADA Sconce (Exterior)





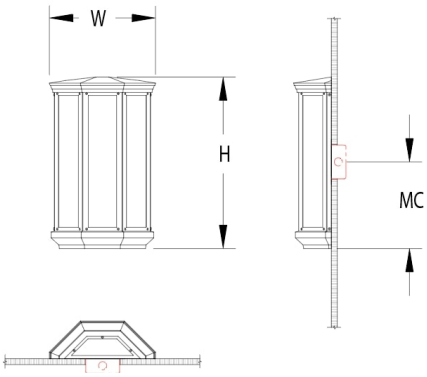

Notes

- CIRCUITS: Single circuit.
- ETL listed to UL standards for wet locations.
- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of heavy gauge aluminum panels and solid cast aluminum top and bottom covers.
- MOUNTING: Fixture supplied with gasketed mounting plate, and hardware. Fixture mounts to standard octagonal junction box

1 Fixture Number

LE-771 11.5"W x 18.25"H x 4" Ext.

2 Finish

Housing

Standard Painted Finishes (PT)

3 Lamping

LED option includes integral 120-277v 1-100% dimming driver compatible with 0-10v controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LE-771

LED Options	Lumens	Wattage
E12 Body (12w)	1497 Initial	12

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v


6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic

8 Panel Options

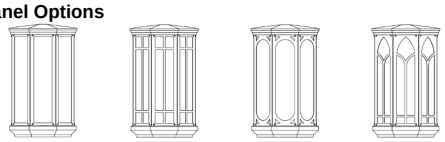

1 Fixture # | 2 Housing (Finish) | 3 Lamping | 4 Color Temp | 5 Dimming | 6 Voltage | 7 Diffuser | 8 Panel

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.