

**1 Fixture Number**

- PE-770** 11.25"W x 26"H 48" Oah.
- PE-772** 18.25"W x 33.5"H 68" Oah.
- PE-774** 18.25"W x 43.5"H 86" Oah.

**2 Finish**

**Housing, Stem & Canopy**  
Standard Painted Finishes (PT)

**3 Lamping**

Includes integral 120-277v 10-100% dimming driver compatible with 0-10 volt controls. Over-current and short-circuit protected. All LEDs are 90 CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

**PE-770**

LED Options	Lumens	Wattage
E41 Body (41w)	3991 Initial	41
E78 Body & Downlight (78w)	3991body/3431 down Initial	78

**PE-772**

LED Options	Lumens	Wattage
E56 Body (56w)	5488 Initial	56
E93 Body & Downlight (93w)	5488 body/3431 down Initial	93

**PE-774**

LED Options	Lumens	Wattage
E76 Body (76w)	7485 Initial	76
E113 Body & Downlight (113w)	7485 body/3431 down Initial	113

**4 LED Color Temp**

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

**5 LED Dimming**

D0: 0-10v

**6 Downlight Optics Options**

B90: 90-deg. beam reflector


**7 Voltage Options**

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

**8 Diffuser Options**

FWH: Frosted Satin Ice

**9 Panel Options**

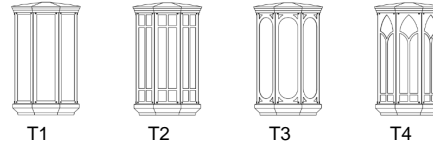

1

2

3

4

5

6

7

8

9

Fixture #

Housing, Stem  
(Finish)

Lamping

Color Temp

Dimming

Downlight Opti

Voltage

Diffuser

Panel