



Tribute Sconce











Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of heavy gauge aluminum panels and solid cast aluminum top and bottom covers.
- MOUNTING: Fixture supplied with mounting template, gasketed mounting plate, and visible hardware. Fixture mounts to 1/4-20 studs attached to structural blocking provided by installing electrician. Standard octagonal junction box required (preferred box placement at bottom arm).
- CIRCUITS: Dual-level circuiting for interior/downlight when applicable.
- ETL listed to UL standards for wet locations.

1 Fixture Number

LE-770	11.25"W x 25"H x 16' Ext.	
LE-772	18.25"W x 34.5"H x 24.75" Ext.	
LE-774	18.25"W x 43.5"H x 24.75" Ext.	

2 Finish

Housing

Standard Painted Finishes (PT)

3 Lamping

Includes integral 120-277v 10-100% dimming driver compatible with 0-10 volt controls. Over-current and short-circuit protected. All LEDs are 90 CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LE-770

LED Options	Lumens	Wattage
E41 Body (41w)	3991 Initial	41
E78 Body & Downlight (78w)	3991body/3431 down Initial	78

LE-772

LED Options	Lumens	Wattage
E56 Body (56w)	5488 Initial	56
E93 Body & Downlight (93w)	5488 body/3431 down Initial	93

LE-774

LED Options	Lumens	Wattage
E76 Body (76w)	7485 Initial	76
E113 Body & Downlight (113w)	7485 body/3431 down Initial	113

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v

6 Downlight Optics Options

B90: 90-deg. beam reflector


7 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

8 Diffuser Options

FWH: Frosted Satin Ice

9 Panel Options

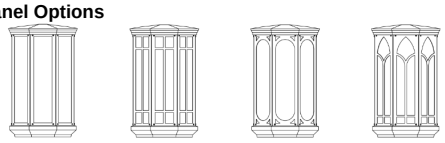

T1 T2 T3 T4

1	2	3	4	5	6	7	8	9
Fixture #	Housing (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Diffuser	Panel

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.