

# Tudor Gothic Pendant

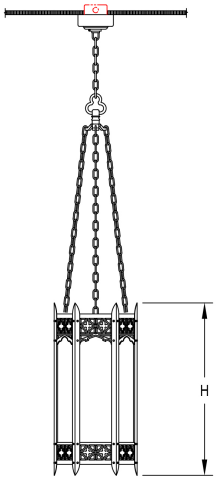




## Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of solid cast aluminum trim panels with fabricated steel corner trim posts.
- MOUNTING: Fixture mounts to a standard octagonal junction box. LPI-660-18 must be attached to structure using a ceiling fan rated electrical box.
- CIRCUITS: Wired for one, two or three circuits.
- OVERALL HEIGHT: Standard OAH includes fixture height plus 3' chain to spreader and 6' main chain to ceiling.
- ETL listed to UL standards for dry and damp locations.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.
- This fixture is suspended by chain. Brown power cord included for D1 (Triac) and D2 (ELV) dimming. Black five-conductor cord supplied for D0 (0-10v) dimming.

**1 Fixture Number**

| | | | | |
|---|---|---|---|---|
| **LPI-660-08** | 19"H | x | 8.25" Dia. | 127" Oah. |
| **LPI-660-11** | 23"H | x | 11.5" Dia. | 131" Oah. |
| **LPI-660-13** | 27.25"H | x | 13.5" Dia. | 135" Oah. |
| **LPI-660-16** | 39.75"H | x | 16.5" Dia. | 148" Oah. |
| **LPI-660-18** | 50"H | x | 18.5" Dia. | 158" Oah. |

**2 Finish**

Standard Painted Finishes (PT)

**3 Lamping**

LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency. Single chain suspension on LPI-660-8..

**LPI-660-08**

| LED Options | Lumens | Wattage |
|---|---|---|
| P27 Body only w/bottom lens (27W) | 2730 (delivered) | 27 |

**Non-LED Lamps**

1N100: (1) 100 watt incandescent

**LPI-660-11**

| LED Options | Lumens | Wattage |
|---|---|---|
| P27 Body only w/bottom lens (27W) | 2730 (delivered) | 27 |
| P50 Body (14w) + Downlight (36w) | 5881 (initial) | 50 |

**Non-LED Lamps**

3N60 / 1R300: (3) 60 watt incandescent & (1) 300 watt R40 med. base

**LPI-660-13**

| LED Options | Lumens | Wattage |
|---|---|---|
| P27 Body only w/bottom lens (27W) | 2730 (delivered) | 27 |
| P63 Body (27w) + Downlight (36w) | 5471 (delivered) | 63 |

**Non-LED Lamps**

3N60 / 3R75 / 1R500: (3) 60 watt incandescent & (3) 75 watt R30 med. base & (1) 500 watt R40 med. base

**LPI-660-16**

| LED Options | Lumens | Wattage |
|---|---|---|
| P54 Body only w/bottom lens (54w) | 5555 (delivered) | 54 |
| P109 Body (54w) + Downlight (55w) | 11760 (delivered) | 109 |
| P150 Body (54w) + Downlight (96w) | 14818 (delivered) | 150 |
| U44 Optional Uplight (44w) | 4038 (delivered) | 44 |

**Non-LED Lamps**

3N60 / 3R300 / 1R500: (3) 60 watt incandescent & (3) 300 watt R40 med. base & (1) 500 watt R40 med. base

**LPI-660-18**

| LED Options | Lumens | Wattage |
|---|---|---|
| P54 Body only w/bottom lens (54w) | 5555 (delivered) | 54 |
| P109 Body (54w) + Downlight (55w) | 11760 (delivered) | 109 |
| P150 Body (54w) + Downlight (96w) | 14818 (delivered) | 150 |
| U44 Optional Uplight (44w) | 4038 (delivered) | 44 |

**Non-LED Lamps**

3N60 / 3R300 / 1R500: (3) 60 watt incandescent & (3) 300 watt R40 med. base & (1) 500 watt R40 med. base

**4 LED Color Temp**

27: 2700K
30: 3000K
35: 3500K
40: 4000K

**5 LED Dimming**

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

**6 Downlight Optics Options**

B60: 60-deg. beam reflector
B90: 90-deg. beam reflector
CON: Concentric Ring Louver (approx. 50-deg. beam)

**7 Voltage Options**

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

**8 Diffuser Options**

WH: White Acrylic
IV: Ivory acrylic
FX: Faux Alabaster Acrylic

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|---|---|---|---|---|---|---|---|
| Fixture # | Finish (Finish) | Lamping | Color Temp | Dimming | Downlight Opti | Voltage | Diffuser |

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.