
Vianne Hybrid



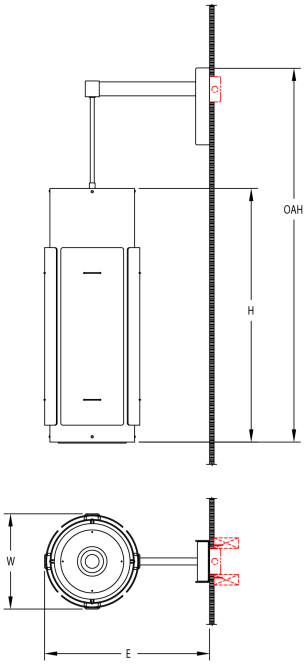

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Extruded aluminum arm, backplate, steel stem, and backplate cover can be ordered with complementary color or finish. Four configured acrylic trim panels fastened to an extruded white acrylic cylinder diffuser with stainless steel hardware.
- MOUNTING: Fixture is supplied with a hanger assembly that attaches to structural blocking in wall. Mounting hardware by others.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

HB-021 24"H x 9.5" Dia. x 15.25" Ext. 37" Oah.
HB-023 30"H x 11.5" Dia. x 19.25" Ext. 45" Oah.
HB-025 36"H x 13.5" Dia. x 23.75" Ext. 54" Oah.

2 Finish

Trim

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)

3 Lamping

LED option includes integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

HB-021

LED Options	Lumens	Wattage
P27 Body only w/bottom lens (27W)	2730 (delivered)	27
P63 Body (27w) + Downlight (36w)	5471 (delivered)	63

Non-LED Lamps

1N200: 200 watt A-21 med. base

HB-023

LED Options	Lumens	Wattage
P40 Body only w/bottom lens (40w)	3796 (delivered)	40
P88 Body (40w) + Downlight (48w)	8128 (delivered)	88
U18 Optional Uplight (18w)	1613 (delivered)	18

Non-LED Lamps

8N75 / 1R300: (8) 75 watt incandescent & (1) 300 watt R40 med. base

HB-025

LED Options	Lumens	Wattage
P54 Body only w/bottom lens (54w)	5555 (delivered)	54
P109 Body (54w) + Downlight (55w)	11760 (delivered)	109
P150 Body (54w) + Downlight (96w)	14818 (delivered)	150
U44 Optional Uplight (44w)	4038 (delivered)	44

Non-LED Lamps

10N100 / R500: (10) 100 watt incandescent & 500 watt R40 mogul base

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Downlight Optics Options

CON: Concentric Ring Louver (approx. 50-deg. beam)
ECR: Black Egg Crate Louver (approx. 40-deg. beam)
BGL: Baffle & glass lens (for QT & MHT lamps only)
LED: Reflector & bottom cover plate (for LED lamp options only)

7 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

8 Diffuser Options

BA: Brushed Solid Aluminum
CD: Ambia configured diffuser (specify option)
CB: Cobalt Blue Acrylic
PT: Standard Painted Finishes

1	2	3	4	5	6	7	8
Fixture #	Trim (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.