
Wet Greene Exterior Pendant



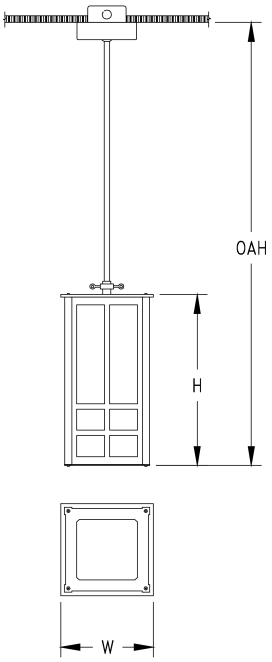

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Solid aluminum top and bottom end caps, extruded aluminum corner posts and laser-cut aluminum accent panels.
- MOUNTING: Fixture supplied with painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

PE-250 8.7"W x 16.3"H 42" Oah.

PE-252 11.5"W x 24.5"H 48" Oah.

2 Finish

Panel

Standard Painted Finishes (PT)

Trim

Standard Painted Finishes (PT)

Raw Copper (CU)

3 Lamping

PE-250

LED Options	Lumens	Wattage
PE22	1636 (initial)	22

Non-LED Lamps

1N100 / 1QP75: (1) 100 watt incandescent & (1) 75 watt PAR30 halogen med. base

PE-252

LED Options	Lumens	Wattage
PE34	2452 (initial)	34

Non-LED Lamps

4N60 / 1QP75: (4) 60 watt incandescent & (1) 75 watt PAR30 halogen med. base

4 LED Color Temp

27: 2700K

30: 3000K

35: 3500K

40: 4000K

5 LED Dimming

D0: 0-10v

6 Voltage Options

120: 120 volt

277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic

FX: Faux Alabaster Acrylic

8 Panel Options



G1 G2 G3 G4 G5 G6

1	2	2	3	4	5	6	7	8
Fixture #	Panel (Finish)	Trim (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Panel

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.