

French Gothic Pendant (CPI series)



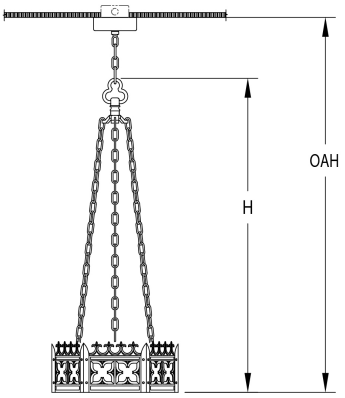



Notes

-
-
- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of solid cast aluminum trim panels with fabricated steel corner trim posts.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- OVERALL HEIGHT: Standard OAH includes fixture height plus 3' chain to spreader and 6' main chain to ceiling.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.
- ETL listed to UL standards for dry and damp locations

1 **Fixture Number**

CPI-340-13 24"H x 13.25" Dia. 96" Oah.

CPI-340-16 30"H x 16.5" Dia. 102" Oah.

2 **Finish**

Standard Painted Finishes (PT)

3 **Lamping**

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

CPI-340-13

LED Options	Lumens	Wattage
P26 (1) 26-watt LED array	2835 (initial)	26
P38 (1) 38-watt LED array	4092 (initial)	38

Non-LED Lamps

3N60: (3) 60 watt incandescent

CPI-340-16

LED Options	Lumens	Wattage
P26 (1) 26-watt LED array	2835 (initial)	26
P38 (1) 38-watt LED array	4092 (initial)	38

Non-LED Lamps

3N60: (3) 60 watt incandescent

4 **LED Color Temp**

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 **LED Dimming**

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 **Downlight Optics Options**

CON: Concentric Ring Louver (approx. 50-deg. beam)

7 **Voltage Options**

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

8 **Diffuser Options**

WH: White Acrylic
IV: Ivory acrylic
FX: Faux Alabaster Acrylic

1	2	3	4	5	6	7	8
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.