


Riverside Angle Wall Mount Exterior Sconce





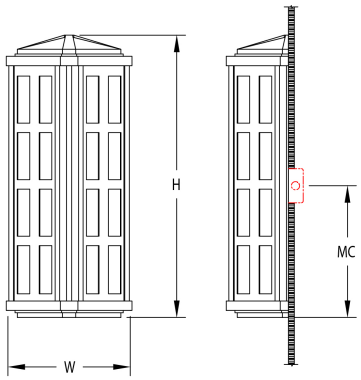



Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of heavy gauge extruded aluminum corner posts, solid cast aluminum end caps and laser-cut aluminum trim panels.
- MOUNTING: Fixture supplied with gasketed mounting plate, and visible hardware. Fixture requires additional support by wall anchors or studs attached to structural blocking provided by installing electrician. Standard octagonal junction box required.
- ETL listed to UL standards for wet locations.
- All MH lamp options include integral electronic ballast.

1 Fixture Number

DE-215 13.25"W x 30"H x 6.5" Ext.
DE-216 19.75"W x 45"H x 9.75" Ext.

2 Finish

Frame
Standard Painted Finishes (PT)

Panels
Standard Painted Finishes (PT)
Raw Copper (CU)

Optional Bar Trim on R1 Panel
No bar trim on R1 panel (NA)
Brushed Stainless Steel (BS)
Powder coat paint (PP)
Polished stainless steel (PS)

3 Lamping

Includes integral wet location rated 120-277v 1-100% dimming driver compatible with 0-10v controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DE-215

LED Options	Lumens	Wattage
E23	1636 (initial)	23

Non-LED Lamps
3N60: (3) 60 watt incandescent

DE-216

LED Options	Lumens	Wattage
E34	2452 (initial)	34
E34/1QP75		

Non-LED Lamps
4N60: (4) 60 watt incandescent


4 LED Color Temp
27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming
D0: 0-10v

6 Voltage Options
120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options
WH: White Acrylic
FX: Faux Alabaster Acrylic

8 Panel Options

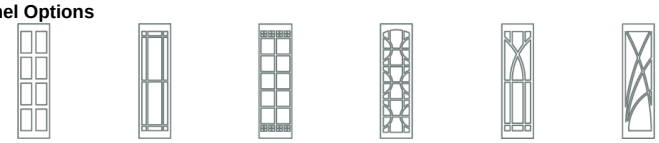

9 Fixture Options
PC: Photo Cell
TAL: Top Acrylic Lens

1	2	2	2	3	4	5	6	7	8	9
Fixture #	Frame (Finish)	Panels (Finish)	Optional Bar T (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Panel	Fixture Option

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.