

Column Sconce 4-Bar Exterior





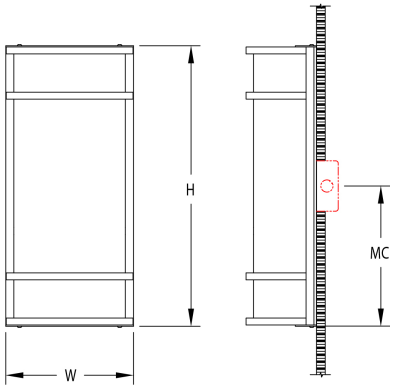

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of extruded aluminum frame with solid aluminum or brass bars over an extruded white acrylic cylinder diffuser.
- MOUNTING: Fixture supplied with gasketed universal mounting plate for installation over standard octagonal junction box.
- UL and C-UL listed for wet locations.

1 Fixture Number

DE-620	7.25"W x 16"H x 4" Ext.	
DE-622	9.25"W x 20"H x 5" Ext.	
DE-624	9.25"W x 28"H x 5" Ext.	

2 Finish

End Caps/Frame
Standard Painted Finishes (PT)

Bars
Standard Painted Finishes (PT)

3 Lamping

Includes integral wet location rated 120-277v 1-100% dimming driver compatible with 0-10v controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DE-620

LED Options	Lumens	Wattage
E11	818 (initial)	11

Non-LED Lamps
2NT40: (2) 40 watt T-10 incandescent

DE-622

LED Options	Lumens	Wattage
E17	1226 (initial)	17

Non-LED Lamps
2N60: (2) 60 watt incandescent

DE-624

LED Options	Lumens	Wattage
E23	1636 (initial)	23

Non-LED Lamps
3N60: (3) 60 watt incandescent

4 LED Color Temp
27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming
D0: 0-10v

6 Voltage Options
120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options
WH: White Acrylic
FX: Faux Alabaster Acrylic

8 Fixture Options
PC: Photo Cell

1	2	2	3	4	5	6	7	8
Fixture #	End Caps/Frame (Finish)	Bars (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Fixture Option

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.