

# Column Sconce Leaf Exterior



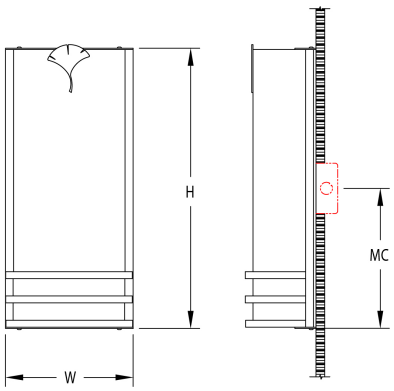


## Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of extruded aluminum frame with solid aluminum or brass bars and laser-cut aluminum or brass leaf accents over an extruded white acrylic cylinder diffuser.
- MOUNTING: Fixture supplied with gasketed universal mounting plate for installation over standard octagonal junction box.
- ETL listed to UL standards for wet locations.

**1 Fixture Number**

| | | |
|---|---|---|
| **DE-730** | 7.25"W x 16"H x 4" Ext. | |
| **DE-732** | 9.25"W x 20"H x 5" Ext. | |
| **DE-734** | 9.25"W x 28"H x 5" Ext. | |

**2 Finish**

**End Caps/Frame**
Standard Painted Finishes (PT)

**Bars**
Standard Painted Finishes (PT)

**3 Lamping**

Includes integral wet location rated 120-277v 1-100% dimming driver compatible with 0-10v controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

**DE-730**

| LED Options | Lumens | Wattage |
|---|---|---|
| E11 | 818 (initial) | 11 |

**Non-LED Lamps**
2NT40: (2) 40 watt T-10 incandescent

**DE-732**

| LED Options | Lumens | Wattage |
|---|---|---|
| E17 | 1226 (initial) | 17 |

**Non-LED Lamps**
2N60: (2) 60 watt incandescent

**DE-734**

| LED Options | Lumens | Wattage |
|---|---|---|
| E23 | 1636 (initial) | 23 |

**Non-LED Lamps**
3N60: (3) 60 watt incandescent

**4 LED Color Temp**
27: 2700K
30: 3000K
35: 3500K
40: 4000K

**5 LED Dimming**
D0: 0-10v

**6 Voltage Options**
120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

**7 Diffuser Options**
WH: White Acrylic
FX: Faux Alabaster Acrylic

**8 Fixture Options**
PC: Photo Cell

| 1 | 2 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|---|---|---|---|---|---|---|---|---|
| Fixture # | End Caps/Frame (Finish) | Bars (Finish) | Lamping | Color Temp | Dimming | Voltage | Diffuser | Fixture Option |

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.