

1 Fixture Number

- DP-891** 5.75"H x 23.5" Dia. 32" Oah.
- DP-893** 8"H x 29" Dia. 34" Oah.
- DP-895** 9.75"H x 34.25" Dia. 36" Oah.

2 Finish

- | | |
|--------------------------------|-----------------------------------|
| Housing | Textured metal accent trim |
| Standard Painted Finishes (PT) | Standard Painted Finishes (PT) |
| Brushed Solid Aluminum (BA) | Stainless Steel (SS) |

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-891

LED Options	Lumens	Wattage
B48 Downlight + Uplight (48w)	1402 up/1533 down (delivered)	48
B48R Uplight + Downlight (48w)	2804 up/766 down (delivered)	48

DP-893

LED Options	Lumens	Wattage
B96 Downlight + Uplight (96w)	2804 up/3066 down (delivered)	96
B96R Uplight + Downlight (96w)	5608 up/1533 down (delivered)	96

DP-895

LED Options	Lumens	Wattage
B128 Downlight + Uplight (128w)	2804 up/4599 down (delivered)	128
B128R Uplight + Downlight (128w)	8412 up/1533 down (delivered)	128

4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

5 LED Dimming

- D0: 0-10v
- D1: Triac (Leading Edge)*
- D2: ELV (Trailing Edge)


6 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

- WH: White Acrylic

8 Panel Options

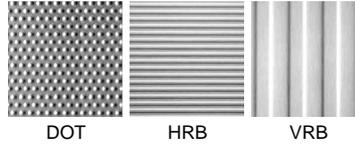

9 Stem Options

