
Kiosk Square Pendant



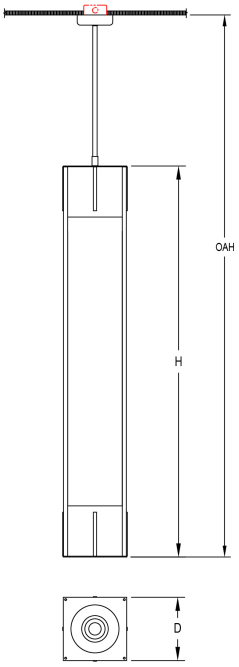

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- OAH is standard unless specified.
- HOUSING: Extruded aluminum corner bars with heavy gauge aluminum top and bottom panels and machined aluminum 1/4" x 1/2" bar details.
- MOUNTING: Fixture supplied with canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
  LP-559: Fixture requires structural support such as 2x4 blocking or 3/8" IP stud extending below finished ceiling.
- CIRCUITS: Dual-level circuiting for interior lamps and downlight (if specified) standard.
- ETL listed to UL standards for dry and damp locations.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

LP-555	10.25"W	x	50.25"H	x	10.25"L	76" Oah.
LP-557	10.25"W	x	62.25"H	x	10.25"L	88" Oah.
LP-559	10.25"W	x	109.25"H	x	10.25"L	135" Oah.

2 Finish

Housing, Stem & Canopy

Standard Painted Finishes (PT)

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LP-555

LED downlight is COB array with 2,168 delivered lumens @ 3500K.

LED Options	Lumens	Wattage
P86 Body Only (86w)	9065 (delivered)	86
P110 Body (86w) + Downlight (23w)	11233 (delivered)	109

LP-557

LED downlight is COB array with 2,168 delivered lumens @ 3500K.

LED Options	Lumens	Wattage
P115 Body Only (115w)	12088 (delivered)	115
P138 Body (115w) + Downlight (23w)	14256 (delivered)	138

LP-559

LED downlight is COB array with 2,168 delivered lumens @ 3500K.

LED Options	Lumens	Wattage
P230 Body Only (230w)	24177 (delivered)	230
P253 Body (230w) + Downlight (23w)	26345 (delivered)	253

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Downlight Optics Options

B50: 50-deg. beam reflector

7 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

8 Diffuser Options

WH: White Acrylic

1	2	3	4	5	6	7	8
Fixture #	Housing, Stem (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.