

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of spun aluminum top and bottom rings and thermoformed opal white acrylic shallow bowl diffuser.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- UL and C-UL listed for dry or damp locations.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

- DP-881** 7"H x 24" Dia. 33" Oah.
- DP-883** 7.5"H x 30" Dia. 34" Oah.
- DP-885** 8.75"H x 36" Dia. 35" Oah.

2 Finish

- Standard Painted Finishes (PT)
- Brushed Solid Aluminum (BA)

3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-881

LED Options	Lumens	Wattage
B48 Downlight + Uplight (48w)	1402 up/1533 down (delivered)	48
B48R Uplight + Downlight (48w)	2804 up/766 down (delivered)	48

Non-LED Lamps

4F39: (4) 39 watt compact fluorescent

DP-883

LED Options	Lumens	Wattage
B96 Downlight + Uplight (96w)	2804 up/3066 down (delivered)	96
B96R Uplight + Downlight (96w)	5608 up/1533 down (delivered)	96

Non-LED Lamps

4F40: (4) 40 watt compact fluorescent

DP-885

LED Options	Lumens	Wattage
B128 Downlight + Uplight (128w)	2804 up/4599 down (delivered)	128
B128R Uplight + Downlight (128w)	8412 up/1533 down (delivered)	128

Non-LED Lamps

6F40: (6) 40 watt compact fluorescent

4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

5 LED Dimming

- D0: 0-10v
- D1: Triac (Leading Edge)*
- D2: ELV (Trailing Edge)


6 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

- WH: Opal White Acrylic

8 Stem Options

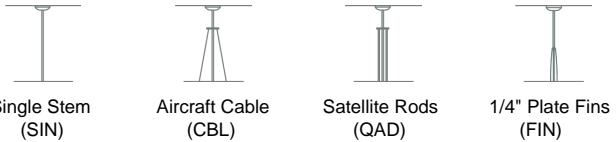

9 Fixture Options

- FU: Fusing
- EMI: Integral Emergency Battery (Fluor.)
- DM: Fluorescent Dimming

