

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Aluminum extrusion with integral LED board channel, heat sink, and acrylic blade support. Machined aluminum components.
- ACRYLIC: Clear 1/8" acrylic panels with laser-etched optical pattern to maximize light output and minimize glare.
- MOUNTING: Fixture supplied with canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box. OAH is standard unless specified.
- X119 with downlight adds 2.5" to Height dimension.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number
P-111 11.5"-12.5"W x 33"H 47.5-49.5 Oah.

2 Finish
Standard Painted Finishes (PT)

3 Lamping
Includes constant current 1-100% dimming drivers mounted in ceiling canopy (or remote). Compatible with 0-10v, Triac, and ELV dimming controls. All LEDs are 80+ CRI, 50,000 hr. L70. Downlight separately circuited.
P-111

LED Options	Lumens	Wattage
X84 Blades Only (84w)	8620 (delivered)	84
X119 Blades (84W) + Downlight (35w)	11872 (delivered)	119

4 LED Color Temp
40: 4000K


5 LED Dimming
D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Downlight Optics Options
B30: 30-deg. beam reflector
B60: 60-deg. beam reflector
B90: 90-deg. beam reflector

7 Voltage Options
120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

8 Diffuser Options
PLG: Planar Optical LightGuide

9 Panel Options

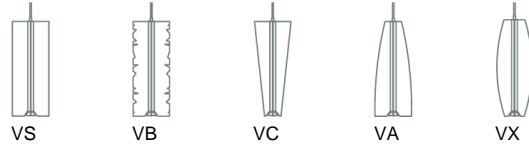

1

Fixture #

2

Finish
(Finish)

3

Lamping

4

Color Temp

5

Dimming

6

Downlight Opti

7

Voltage

8

Diffuser

9

Panel