

## Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of spun aluminum or brass rings trimmed with cast aluminum or brass band, acrylic bowl diffuser and choice of stem kit.
- MOUNTING:
  - CP-830 & 832: Fixture specified with brushed or painted finish supplied with swivel hanger for mounting to standard octagon junction box. Fixture specified with brass material supplied with swivel hanger requiring attachment to structure using a ceiling fan rated electrical box.
  - CP-831 & CP-833: Fixture supplied with a painted canopy, 60-degree swivel ball and hanger. Structural support is required for this heavy fixture. 2 x 4 blocking or 1/2" IP stud extending 1/2" below finished ceiling through center of octagonal junction box is required.
- ETL listed to UL standards for dry and damp locations
- \*Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

### 1 Fixture Number

<b>CP-830</b>	14.5"H x 72.5" Dia. 34" Oah.	<b>CP-832</b>	17"H x 84" Dia. 46" Oah.
<b>CP-831</b>	14.5"H x 72.5" Dia. 34" Oah.	<b>CP-833</b>	17"H x 84" Dia. 46" Oah.

### 2 Finish

Brushed Solid Aluminum (BA)	Egg & Dart Cast Trim (EGD)
Standard Painted Finishes (PT)	Greek Key Cast Trim (GRK)
Polished Brass (PB)	Rope Cast Trim (ROP)
Solid Antique Brass (SAB)	
Faux Antique Brass (FAB)	

### 3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

#### CP-830 ( )

LED Options	Lumens	Wattage
CH130 Two Bowls - Up & Downlight	2545 up/1855 dn per bowl (delivered)	130

#### Non-LED Lamps

6N100: (6) 100 watt incandescent

#### CP-831 ( )

LED Options	Lumens	Wattage
CH260 Four Bowls - Up & Downlight	2545 up/1855 dn per bowl (delivered)	260

#### Non-LED Lamps

12N100: (12) 100 watt incandescent

#### CP-832 ( )

LED Options	Lumens	Wattage
CH256 Two Bowls - Up & Downlight	5091 up/3719 dn per bowl (delivered)	256

#### Non-LED Lamps

8N100: (8) 100 watt incandescent

#### CP-833 ( )

LED Options	Lumens	Wattage
CH512 Four Bowls - Up & Downlight	5091 up/3710 dn per bowl (delivered)	512

#### Non-LED Lamps

16N100: (16) 100 watt incandescent

### 4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

### 5 LED Dimming

- D0: 0-10v
- D1: Triac (Leading Edge)\*
- D2: ELV (Trailing Edge)


### 6 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

### 7 Diffuser Options

- WH: Opal White Acrylic
- FX: Faux Alabaster Acrylic

### 8 Stem Options

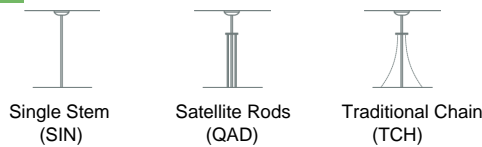

1	2	2	3	4	5	6	7	8
Fixture #	Finish (Finish)	Finish (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Stem